


The Tastic® Neo features specially-designed frosted, toughened glass to diffuse heat effectively. To maximise comfort levels, the Tastic® Neo Dual can be operated on one or two heat lamp settings.



Gimbal-mounted energy saving LED downlights allow directional lighting.

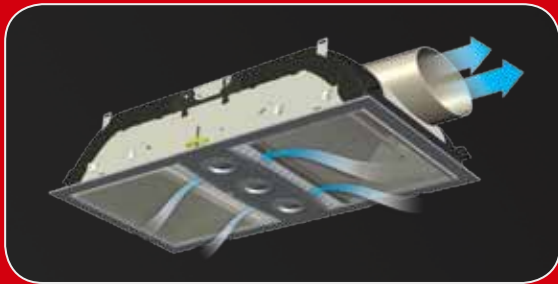

Side ducting permits versatility for installation into multi-story dwellings with limited space between the ceiling and the floor above. The unit vents directly outside, making it perfect for 5 Star homes.




warranty on
heat lamps and
in-line exhaust



in-home
warranty on unit

Tastic® Neo model comparisons

	NEO SINGLE WHITE Remote	NEO SINGLE SILVER Remote	NEO SINGLE WHITE Hardwired	NEO SINGLE SILVER Hardwired	NEO DUAL WHITE Hardwired	NEO DUAL SILVER Hardwired
Model Number	31211	31212	31111	31112	32111	32112
Halo Heat Technology	1 x 800 W tungsten halogen	1 x 800 W tungsten halogen	1 x 800 W tungsten halogen	1 x 800 W tungsten halogen	2 x 800 W tungsten halogen	2 x 800 W tungsten halogen
Remote Operation	Yes	Yes	No	No	No	No
Wall Switch	N/A	N/A	Supplied	Supplied	Supplied	Supplied
Cut Out Size	326 x 462	326 x 462	326 x 462	326 x 462	326 x 712	326 x 712
Current Rating (Amps)	3.6	3.6	3.6	3.6	7.0	7.0
Watts (Fan in Brackets)	875 (75)	875 (75)	875 (75)	875 (75)	1675 (75)	1675 (75)
Min Clearance Required (mm)	230 + 15 above unit	230 + 15 above unit	230 + 15 above unit	230 + 15 above unit	230 + 15 above unit	230 + 15 above unit
Supply (Volts)	240	240	240	240	240	240
Suits Bathroom Ceiling Heights	up to 2.4m	up to 2.4m	up to 2.4m	up to 2.4m	up to 3.3m	up to 3.3m
Fan Size (230 mm high)*	170 ducted blower Suits 150 dia. duct	170 ducted blower Suits 150 dia. duct	170 ducted blower Suits 150 dia. duct	170 ducted blower Suits 150 dia. duct	170 ducted blower Suits 150 dia. duct	170 ducted blower Suits 150 dia. duct
Capacity (Litres/Sec)	96 (when using 6m of ducting)	96 (when using 6m of ducting)	96 (when using 6m of ducting)	96 (when using 6m of ducting)	96 (when using 6m of ducting)	96 (when using 6m of ducting)
Capacity (m³/Hour)	346 (when using 6m of ducting)	346 (when using 6m of ducting)	346 (when using 6m of ducting)	346 (when using 6m of ducting)	346 (when using 6m of ducting)	346 (when using 6m of ducting)
Approx. Weight (kg)	5	5	5	5	9	9
Unit Dimensions (mm)	358 (W) x 476 (L) x 166 (D)	358 (W) x 476 (L) x 166 (D)	358 (W) x 476 (L) x 166 (D)	358 (W) x 476 (L) x 166 (D)	358 (W) x 729 (L) x 166 (D)	358 (W) x 729 (L) x 166 (D)

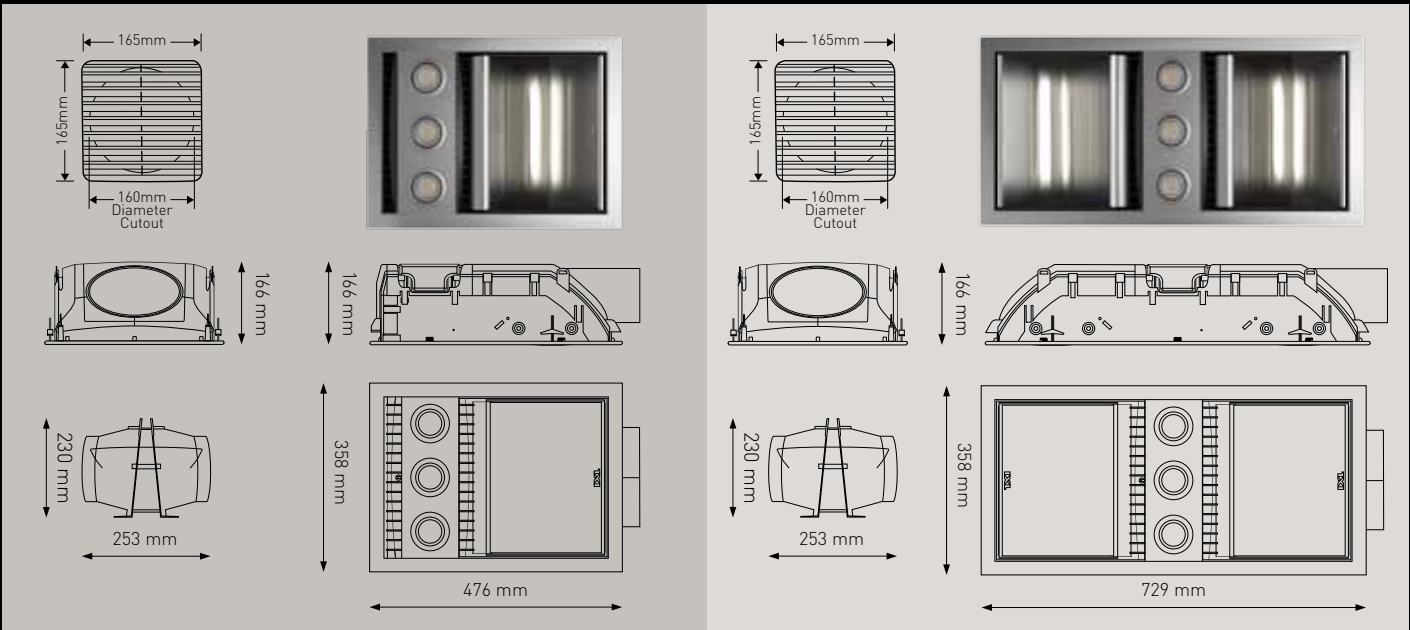

* Where the in-line blower unit is installed into an environment that has limited access and the unit needs to be serviced or replaced under warranty, a replacement blower will be supplied free of charge by IXL, however, all associated reinstallation charges will be borne by the owner.

Sampford IXL

SAMPFORD IXL PTY LTD
1 Wood Street, South Geelong,
Victoria 3219 Australia. Phone 1300 727 421.
www.ixlappliances.com.au
info@sampfordixl.com.au
IXL and Tastic are registered trademarks
of Sampford IXL Pty Ltd.

Whilst every effort is made to provide current information at the time this brochure was produced, continuing product improvements mean the enclosed specifications, images and literature may differ from what is actually available.

Cat. No. BRXLNE02/4



Designed, engineered and made in Australia.

Inspired and de(light)ful.

Tastic
NEO



Cutting-edge technology with simple elegant design

IXL's Tastic® Neo range of innovative products blend cutting-edge technology with understated sophistication to give you a light-filled, evenly heated, well ventilated bathroom.

The unobtrusive design conceals tungsten halogen heating lamps with improved heating efficiency and directional downlights that brighten the spaces you choose to light. And an in-line extraction system that vents directly outside the home means no unwanted draughts, just dry, even heat. It also makes a Tastic® Neo the perfect choice for single and multi-storey homes. With the flick of a wall switch or the click of a remote controller, you can experience the difference that IXL's attention-to-detail in the areas of safety, versatility and comfort offer.

You'll enjoy unprecedented quality with a five year in-home warranty and a two-year replacement warranty on heat lamps and the in-line fan.

Start and end each day with a little bit of bliss, with a Tastic® Neo.

For detailed information on how to effectively ventilate the bathroom, please refer to www.ixlappliances.com.au/ventilation_home.html

Change the way you feel in your bathroom



Tastic Neo Single Remote Control
31211 White 31212 Silver

- Halo Heat Technology – 1 x 800 W tungsten halogen infrared heat lamp
- Omni Lighting – 3 x 7 W gimbal-mounted LED downlights
- Ventair In-Line Extraction – ducted exhaust fan
- Remote operation of all Tastic Neo functions
- Suits ensuite and mid sized bathrooms with ceiling height to 2.4m
- Back Draught Flaps
- External Grill supplied
- 2 year warranty on heat lamps
- 5 year in-home warranty
- Australian made



Tastic Neo Single Hardwired
31111 White 31112 Silver

- Halo Heat Technology – 1 x 800 W tungsten halogen infrared heat lamp
- Omni Lighting – 3 x 7 W gimbal-mounted LED downlights
- Ventair In-Line Extraction – ducted exhaust fan
- Suits ensuite and mid sized bathrooms with ceiling height to 2.4m
- Back Draught Flaps
- External Grill supplied
- 2 year warranty on heat lamps
- 5 year in-home warranty
- Australian made



Tastic Neo Dual Hardwired
32111 White 32112 Silver

- Halo Heat Technology – 2 x 800 W tungsten halogen infrared heat lamps
- Omni Lighting – 3 x 7 W gimbal-mounted LED downlights
- Ventair In-Line Extraction – ducted exhaust fan
- Suits mid sized and large bathrooms with ceiling height to 3.3m
- Back Draught Flaps
- External Grill supplied
- 2 year warranty on heat lamps
- 5 year in-home warranty
- Australian made



Halo Heat Technology

Tungsten halogen heating technology distributes infrared heat effectively across the body.



Ventair In-Line Extraction

To extract steam from your bathroom, the fully-ducted Ventair removes air to outside and seals when not in use.



LED Omni Lighting

Gimbal-mounted downlights allow directional lighting towards the areas light is required.



Remote Operation

For ease of installation and remote use of all Tastic functions (Models 31211 & 31212).